




ENERGY



ELECTRICITY

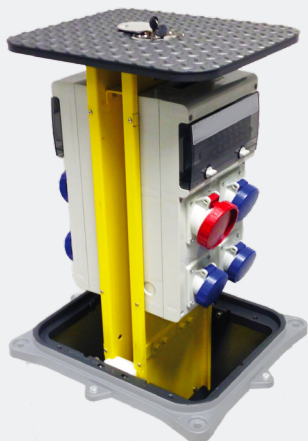

B4030 60

Semiautomatic stations for power supply and utility

Power where and when it's needed - safely

Designed to provide electrical, the Energy feature **semi-automatic movement**: they rise using a key that unlocks the **integrated handle**. Perfect for urban spaces, campsites, marinas, and shopping centers, they combine discreet integration with full functionality.

- **Retractable design** for maximum order and safety
- **For both driving and pedestrian zones** (load classes C250)
- **Two-sided design** for increased usable space
- Custom solutions: **electrical sockets**.

Smart! Choose Energy B4030 if you're looking for the perfect balance between **available space** and **functionality**!



Standard configuration


The standard configuration of our systems is designed to ensure efficiency, safety and ease of management. The configuration includes:

- **Tower**, device that provides electrical power, water, compressed air and telephone
- **Foundation box**, an underground structure housing the tower unit.

WARNING: The sockets are not included. Custom configurations must be approved.

PILOMAT
HÖRMANN


Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com



B4030 60


Semiautomatic stations for power supply and utility

B4030 60	
Dimensions	400 × 300 mm
Height	600 mm
Material	S235JR normal steel
Surface treatment	Anti-corrosion treatment – standard painting: yellow RAL 1021, black cover plate
Connection lines out of the tower	Standard: 3m (only for orders of tower equipped with sockets)
Protection category of electrical components	IP 66
Load class (EN124)	C250
Infill of cover plate corresponding to the road surface	NO

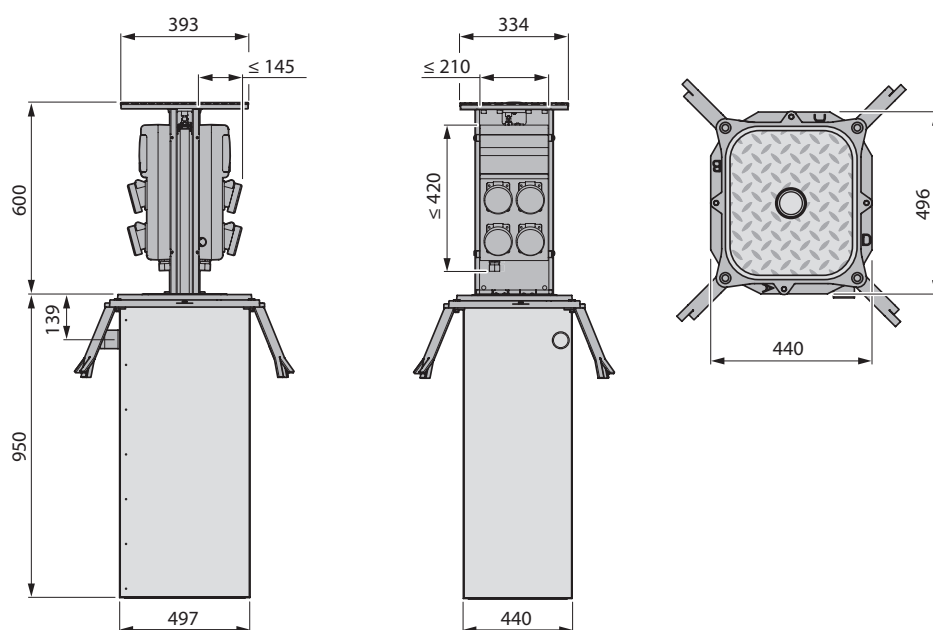

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com



ENERGY



ELECTRICITY

B4030 60


Semiautomatic stations for power supply and utility

Available items Energy B4030

A2	Protective earth socket – 230 V 16 A 1P/N/PE with line protection switch, 1P + N, 6 kA / C 16 A
A1	Socket IEC 309 (CEE blue) – 230 V 16 A 1P/N/PE with line protection switch, 1P + N, 6 kA / C 16 A
C1a	Socket IEC 309 (CEE blue) – 230 V 16 A 1P / N / PE with all-pole main switch with line protection switch, 1P + N, 6 kA / C 16 A
C1b	Socket IEC 309 (CEE blue) – 230 V 32 A 1P / N / PE with all-pole main switch with line protection switch, 1P + N, 6 kA / C 32 A
B	Socket IEC 309 (CEE red) – 400 V 16 A 3P/N/PE with line protection switch, 4P, 6 kA / C 16 A
C2a	Socket IEC 309 (CEE red) – 400 V 16 A 3P / N / PE with all-pole main switch with line protection switch, 4P, 6 kA / C 16 A
C2b	Socket IEC 309 (CEE red) – 400 V 32 A 3P / N / PE with all-pole main switch with line protection switch, 4P, 6 kA / C 32 A

Configuration options

8xA	7xA 1xB	6xA 2xB	5xA 2xB	4xA 3xB	4xA 2xC	3xA 3xB	2xA 3xB	2xA 1xB 2xC	1xA 3xB
-----	------------	------------	------------	------------	------------	------------	------------	-------------------	------------

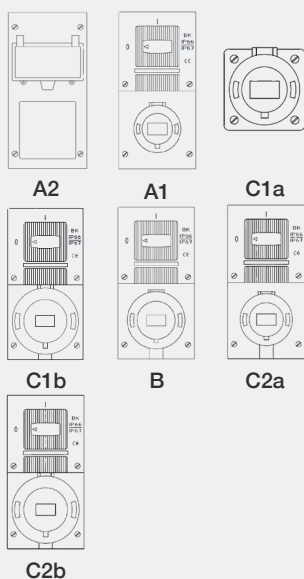

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com