

# 275/RM 600



## REMOVABLE BOLLARDS

The removable bollard PILOMAT 275/RM 600 are typically used to prevent the parking of unauthorised vehicles, transit and access by unauthorised vehicles in driveways, and protection of shatter-proof windows. Because of the procedure of parking, it is advised that the removable PILOMAT be used only if the amount of daily movements is limited (if not, the automatic PILOMAT should be used) or when the depth of installation does not allow for the installation of the automatic PILOMAT.



PAG.1/2

**PILOMAT**

100% MADE IN ITALY



PILOMAT s.r.l.  
www.pilomat.com / pilomat@pilomat.com  
Via Zanica 17/p, 24050, Grassobbio (BG) Italy  
Tel. +39.035.29.72.20  
Copyright 2016© Pilomat S.r.l. All rights reserved


275/RM 600\_DATASHEET.16 REVIEW 16/11/2016

# 275/RM 600




## OPTIONAL ITEMS

- REMOVABLE BOLLARD 275/RM 600FEV – NORMAL STEEL PAINTED equipped with 2 standard keys
- REMOVABLE BOLLARD 275/RM 600IXS – STAINLESS STEEL BRUSHED equipped with 2 standard keys
- ADHESIVE REFLECTING STRIP - WHITE (NO LOGO)
- PAINTING WITH RAL COLOUR ON REQUEST
- SECURITY LOCK - 2 KEYS
- SECURITY LOCK WITH IDENTICAL KEYS
- ADDITIONAL STANDARD KEY FOR REMOVABLE BOLLARD
- ADDITIONAL SECURITY KEY FOR REMOVABLE BOLLARD

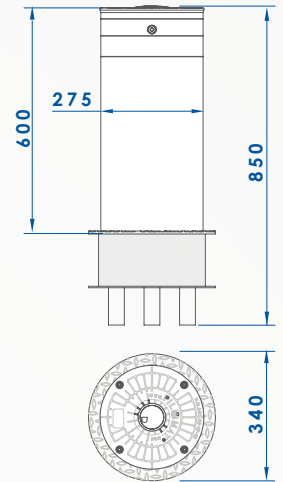

REMOVABLE CYLINDER	NORMAL STEEL FE370 - AISI 304 STAINLESS STEEL
REMOVABLE CYLINDER DIAMETER	275mm
REMOVABLE CYLINDER HEIGHT	600mm
REMOVABLE CYLINDER NORMAL STEEL THICKNESS	5mm
REMOVABLE CYLINDER STAINLESS STEEL THICKNESS	5mm
REMOVABLE CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE
REMOVABLE CYLINDER STAINLESS STEEL FINISH	AS ABOVE OR BRUSHED
REFLECTING ADHESIVE STRIP	INCLUDED IN THE SUPPLY - HEIGHT 55mm
IMPACT RESISTANCE (WITHOUT DEFORMATION)	40.000 J
BREAKOUT RESISTANCE	200.000 J
OPERATING TEMPERATURE	-40 °C +60 °C

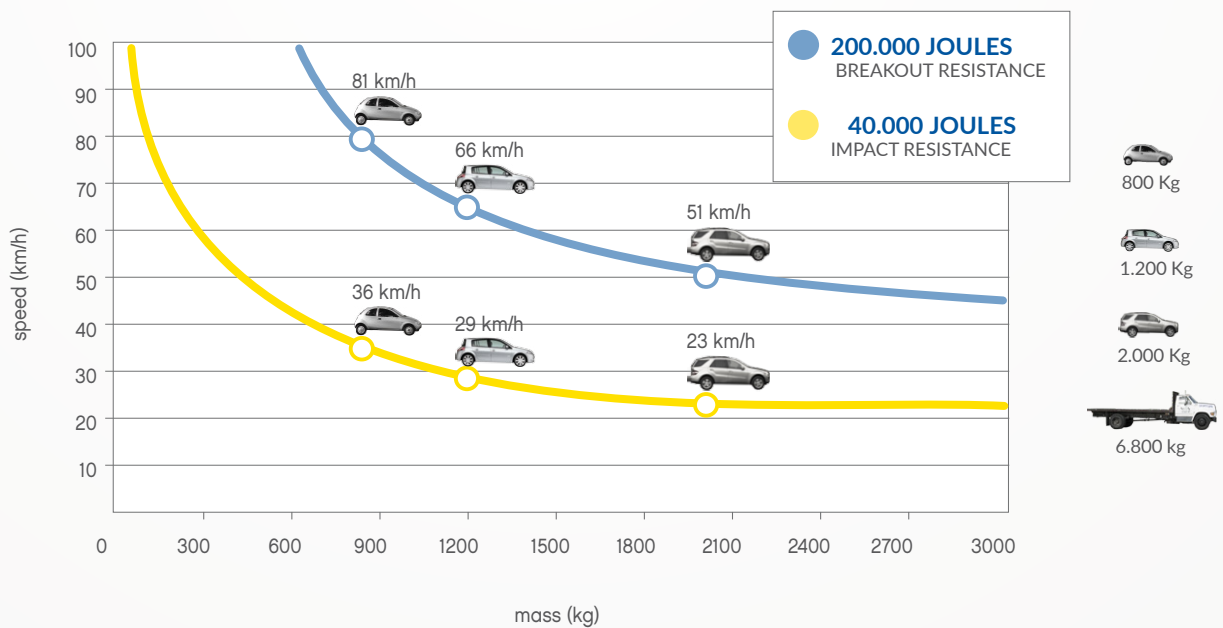

PILOMAT s.r.l.  
 www.pilomat.com / pilomat@pilomat.com  
 Via Zanica 17/p, 24050, Grassobbio (BG) Italy  
 Tel. +39.035.29.72.20  
 Copyright 2016© Pilomat S.r.l. All rights reserved