


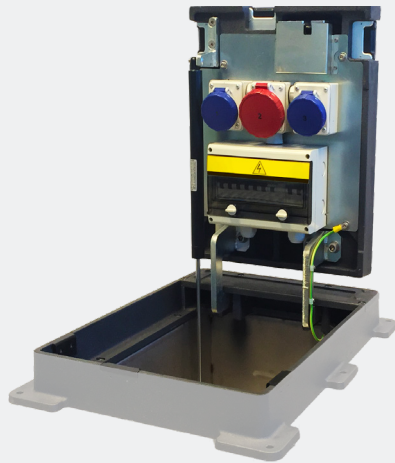

LONDON 6040

Semiautomatic stations for power supply and utility

Power where and when it's needed - safely

Designed to provide **electrical power and complementary services**, the London stations feature a **semi-automatic 90-degree opening**, with the key unlocking the integrated lock. Perfect for urban spaces, campsites, marinas, and shopping centers, they integrate discreetly while offering maximum functionality.

- **Reduced excavation** thanks to the 90-degree opening
- **Retractable design** for maximum order and safety
- **For both driving and pedestrian zones** (load class D400)
- Custom solutions: **electrical outlets, water, data, compressed air**.

Smart! Choose London —it provides services even while closed!



Standard configuration


The standard configuration of our systems is designed to ensure efficiency, safety and ease of management. The configuration includes:

- **Tower**, device that provides electrical power, water, compressed air and telephone
- **Foundation box**, an underground structure housing the tower.

WARNING: The sockets are not included. Custom configurations must be approved.

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com



ENERGY



ELECTRICITY



WATER



COMPRESSED AIR




PHONE

LONDON 6040

Semiautomatic stations for power supply and utility


LONDON 6040

Dimensions	710x480x450mm
Height	535mm
Material	S235JR normal steel/cast iron
Surface treatment	Anti-corrosion coating – standard painting grey anthracite
Connection lines out of the tower	Standard: 3m (only for orders of tower equipped with sockets)
Protection category of electrical components	IP 66
Load class (EN 124)	D400
Infill of cover plate corresponding to the road surface	NO

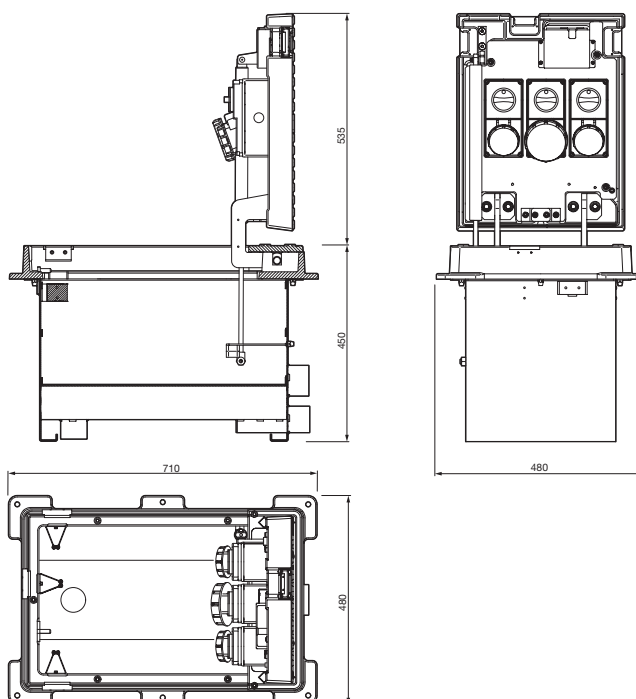

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com




LONDON 6040

Semiautomatic stations for power supply and utility

Configurable components London 6040

C1c	Protective earth socket – 230 V 16 A 1P/N/PE with line protection switch, 1P + N, 6 kA / C 16 A
A	Socket IEC 309 (CEE blue) – 230 V 16 A 1P / N / PE with line protection switch, 1P + N, 6 kA / C 16 A
C1a	Socket IEC 309 (CEE blue) – 230 V 16 A 1P / N / PE with all-pole main switch with line protection switch, 1P + N, 6 kA / C 16 A
C1b	Socket IEC 309 (CEE blue) – 230 V 32 A 1P / N / PE with all-pole main switch with line protection switch, 1P + N, 6 kA / C 32 A
B	Socket IEC 309 (CEE red) – 400 V 16 A 3P/N/PE with line protection switch, 4P, 6 kA / C 16 A
C2a	Socket IEC 309 (CEE red) – 400 V 16 A 3P / N / PE with all-pole main switch with line protection switch, 4P, 6 kA / C 16 A
C2b	Socket IEC 309 (CEE red) – 400 V 32 A 3P / N / PE with all-pole main switch with line protection switch, 4P, 6 kA / C 32 A
T	Configuration with Internet / telephone socket RJ45 in housing IP 55 – connecting lead (CAT 6) length 3 m
W	Water connection with tap with quick connector – hose length 3 m
cA	Compressed air connection with quick-lock coupling – hose length 3 m

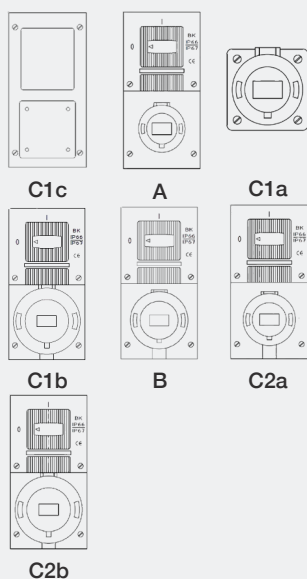


Configuration options

Energy-telephone-compressed air				Energy-compressed air				Compressed air-water
3xA	2xA 1xB	2xC1	1xC1 1xC2	2xA 1xC	1xA 2xB	3xB	1xB 1xC	
2xT 3xCa	2xT 3xCa	2xT 3xCa	2xT 3xCa	3xCa	3xCa	3xCa	3xCa	3xCa 3xW

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com



ENERGY



ELECTRICITY



WATER



COMPRESSED AIR



PHONE

LONDON 6040

Semiautomatic stations for power supply and utility

Accessories



RAL painted



Foundation box
inox



PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com