

DATA SHEET

Product line



Mobile



Classification



Additional functions with corresponding equipment



Coating in RAL to choose

OktaBlock

The OktaBlock mobile vehicle blocker secures driveways and access to open-air events and effectively prevents vehicles from smashing through.

- Completely assembled single blockers for easy installation without on-site structural work
- Can be used as a single module thanks to certification. Modules do not have to be connected
- Flexible, location-independent, cost-efficient, maintenance-free
- Can be used as a notice or advertising space on request




Technical data

Version	Mobile
Diameter	273 mm
Base plate dimension	800 × 800 mm
Height	1250 mm
Base plate height (chamfered)	5 – 33 mm
Material thickness	16 mm
Cylinder infill	Concrete
Weight	Approx. 350 Kg
Impact energy with destruction	750000 J
Certified according to	PAS68, IWA14-1, ASTM M30, K4

Equipment		Function
Cylinder surface	Steel S 355	●
Surface treatment	Steel version: steel coated (Anthracite grey)	●
Eyebolt M20, including sling rope	Transport aid for lifting the OktaBlock	●
Reflecting strips	Improved visibility at night, all-round	●
Placement case	Tools for marking positions, compensating for uneven subsurfaces and additional spare screw plugs	○
Maintenance case	Spare warning marks, sling rope and spray paint for repairing surface damage	○
OktaMover	For easy placement and relocation without a forklift, crane or similar	○

● Standard ○ Optional

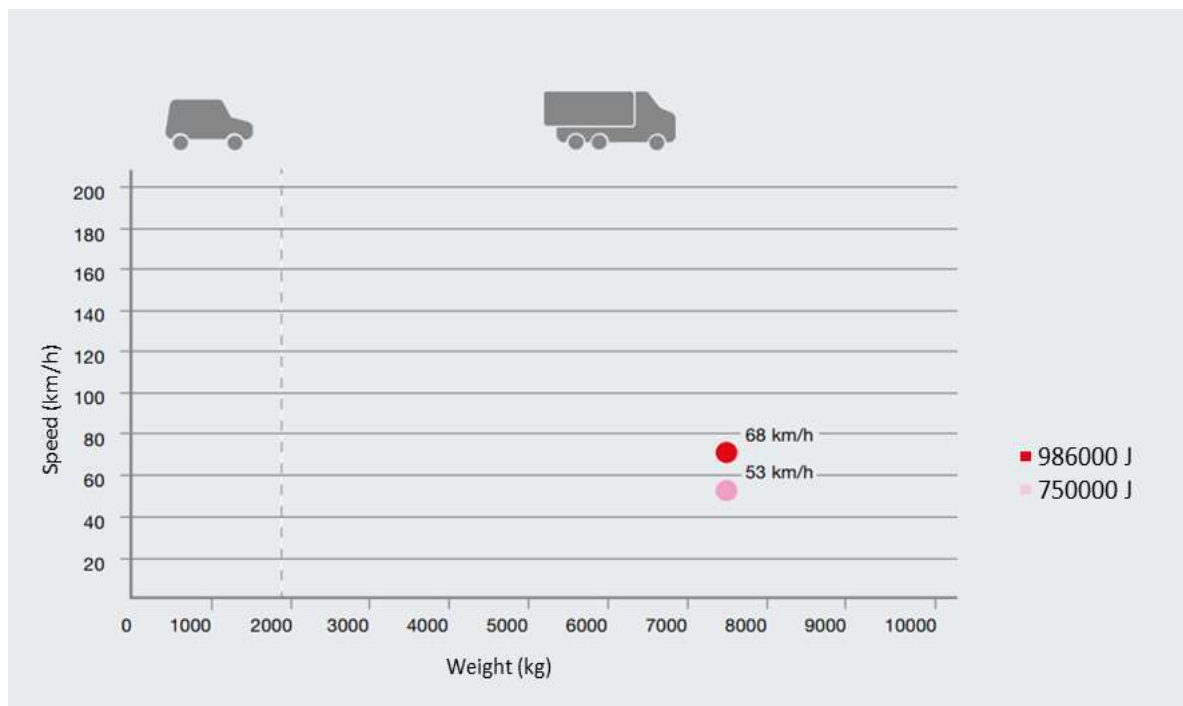

The information above, in particular the specifications and illustrations, is not binding and does not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.