275/PF 500F-600F-800F



FIXED BOLLARDS WITH BRACKETS TO BE ANCHORED IN GROUND

The fixed 275/PF bollards have been designed and built with architectural appearence similar to that of the retractable bollards and therefore also allows the combined use of both versions. Current models are the result of our 40 years' experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

GENERAL FEATURES

The fixed bollards are used in public or private areas in order to define or prevent the parking of vehicles, for preventing access to vehicles in pedestrian areas. These items can be cemented to the ground, the breakout resistance depends on the depth to which it is anchored into the ground.





Custom stainless steel cylinder cover

Stone mantle



PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2025© Pilomat S.r.l. All rights reserved

REVIEW 01/04/2025



275/PF 500F-600F-800F



AVAILABLE ITEMS

BOLLARD 275/PF FEV - NORMAL STEEL PAINTED

BOLLARD 275/PF IXV - STAINLESS STEEL PAINTED

BOLLARD 275/PF IXS - STAINLESS STEEL BRUSHED

KNURLING ON CYLINDER


HEAD WITHOUT LOGO FOR 275/PF

MULTILED LIGHTING STRIP- 25 LED POINTS


LIGHTING STRIP POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 8 BOLLARDS)

REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)

PAINTING WITH RAL COLOUR ON REQUEST



	275/PF-500F	275/PF-600F	275/PF-800F	
CYLINDER MATERIAL	S235JR NORMAL STEEL -	S235JR NORMAL STEEL - X5CrNi 18-10 (AISI 304) STAINLESS STEEL X5CrNiMo 17-12-2 (AISI 316) STAINLESS STEEL		
CYLINDER DIAMETER		273mm		
CYLINDER HEIGHT	500mm	600mm	800mm	
CYLINDER NORMAL STEEL THICKNESS		6mm		
CYLINDER STAINLESS STEEL THICKNESS		AISI 304: 6mm - AISI 316: 4mm		
CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION T	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE		
CYLINDER STAINLESS STEEL FINISH	GREY ANTI	GREY ANTHRACITE STANDARD PAINTING OR BRUSHING		
NEW CYLINDER FINISH	N.A.	N.A. STONE COATING AND INDIVIDUALLY DESIGNED CYLINDEF COVER UPON CUSTOMER'S REQUEST		
OTHER CYLINDER FINISH		KNURLING		
REFLECTING ADHESIVE STRIP		STANDARD - HEIGHT 55MM		
PROTECTION CLASS		IP67		
IMPACT RESISTANCE (WITHOUT DEFORMATION)		40.000 J		
BREAKOUT RESISTANCE		250.000 J		
BRACKETS TO WALL		STANDARD - N. 4 BRACKETS		
CONNECTION LINE FOR LIGHTING STRIP (OPTIONAL)	S	STANDARD 10M (MAX. LENGTH 80M)		

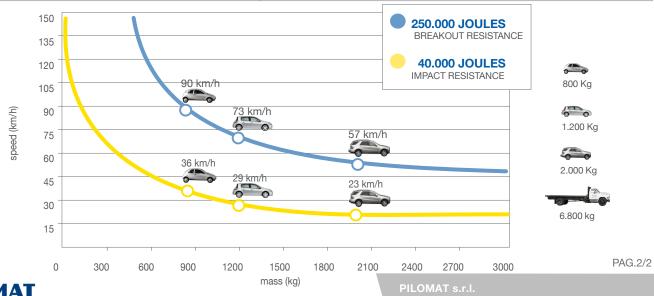



www.pilomat.com / pilomat@pilomat.com Via Zanica 17/p, 24050, Grassobbio (BG) Italy Tel. +39.035.29.72.20 Copyright 2025© Pilomat S.r.l. All rights reserved