



E-GO
SERIES



E-GO 114-600A /114-800A

Automatic bollards electromechanical Plug & Play



Smart protection for your home... and your car

The automatic bollards of the **E-GO Series** are the ideal solution for those looking for an **effective security system** that is **easy to install** and requires **minimal maintenance**. Thanks to Plug & Play technology, installation is immediate and management is intuitive.

- Perfect for **residential driveways and parking spaces**
- **Quick installation** in under one hour
- Control system for **2 bollards simultaneously**
- **Low maintenance** thanks to electromechanical technology
- **Modular control housing** with a maximum distance of 15m between bollard and control unit.

Smart!

Choose E-GO for **secure, smart, and simple access**.



Standard configuration

The standard configuration of our systems is designed to ensure efficiency, safety and ease of management. The configuration includes:

- **Automatic stainless bollard** with integrated pit
- **Control unit**, preconfigured and ready-to-use, Bi-Secur receiver included.

The bollard is supplied as standard:

- Without LED
- Head with smooth plate
- Pilomat reflective strip Pilomat (white-red)

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com






E-GO
SERIES



E-GO 114-600A /114-800A

Automatic bollards electromechanical Plug & Play

	E- GO 114-600A	E-GO 114-800A
Cylinder material	X5CrNi 18-10 (AISI 304) stainless steel	
Cylinder diameter	114mm	
Cylinder height	600mm	800mm
Cylinder thickness	4mm	
Cylinder stainless steel finish	Brushing	
Movement principle	Electromechanical integrated in bollard	
Reflecting adhesive strip	Standard - height 22mm	
Rising time	7s	9s
Lowering time	7s	9s
Emergency lowering	Standard - manual	
Safety reversal	Standard	
Connection line to control unit	Standard 15m (can be extended to max. 30 m on site)	
Voltage for control unit	230 V AC (+/- 10 %) 50 / 60 Hz	
Electromechanical operator power consumption	100W (150W with heating element)	
Consumption during standby	0,8W	
Time until standby	1min	
Life units	200.000 Cycles	
Type of use	100 cycles/day	
Protection class	IP 69K	
Breakout resistance	16.000 J	
Nominal operating temperature	-20°C +60°C (for low temperatures, see heating element)	
Weight for bollard and foundation box	18,6 kg	25 kg
Packaging dimension	120 x 22 x 22 cm	150 x 22 x 22 cm
Packaging dimension for control unit and accessories	40 x 40 x 20 cm	
Load class (EN124)	D400	

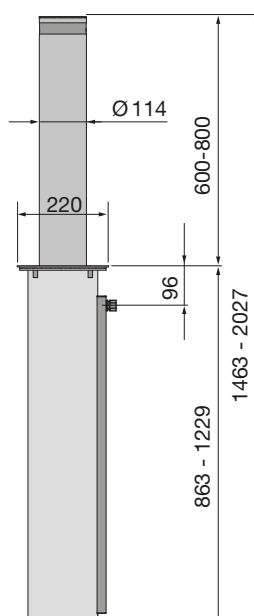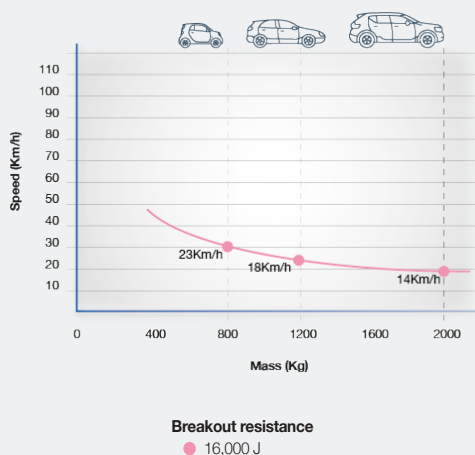

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com



E-GO
SERIES




Pilomat offers **safety accessories** for every installed system: including photocells, flashing lights and acoustic sensors for emergency vehicles. Each device is designed to **ensure maximum efficiency, clear signaling and secure control.**

Available finishes



Brushing

Safety and visibility

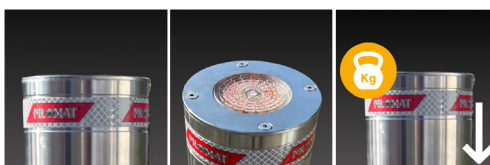

Reflecting strip

LED lighting point


Safety reverse function

Special design



Custom engraving
(only without LED)

Functions

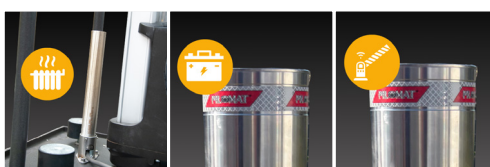

Heating element

Emergency battery

Interface module

PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com **www.pilomat.com**

E-GO 114-600A /114-800A

Automatic bollards electromechanical Plug & Play



E-GO
SERIES



E-GO 114-600A /114-800A

Automatic bollards electromechanical Plug & Play

Pilomat provide a complete range of **control devices**, designed to make the use of installed systems practical and immediate. Buttons, selector and remote controls allow users to operate the devices with a single gesture, **ensuring immediate, reliable control and intuitive management.**

Control devices



Key switch



Card reader



Numeric key pad



Finger scan



Hand transmitter




License plate reader



App or Bluetooth



Timer
(week - year)



GSM activator



P-Connect



Cloud Unit W5-B



PILOMAT
HÖRMANN

Pilomat S.r.l.
Via Zanica 17/P, Grassobbio (BG) Italia
pilomat@pilomat.com www.pilomat.com