


TYRE KILLER SMALL



Tyre Killers are composed by heavy duty spikes that rise from the ground; they operate like an access control barrier by preventing the passage of unauthorized vehicles or allowing the exit from a supervised area. They can be installed with other access control elements (for example bollards, road blockers or gates) in order to achieve an access control check-point at the highest level of security. Many optional items are available for in order to configure each individual system. Current models are the result of our 40 years' experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

GENERAL FEATURES

Tyre Killer Small with mechanical movement, allows only the exit of vehicles from a supervised area and prevents the entrance to unauthorized ones; it is typically used for perimeter protection at the exit of companies, hotels, convention centers and similar.

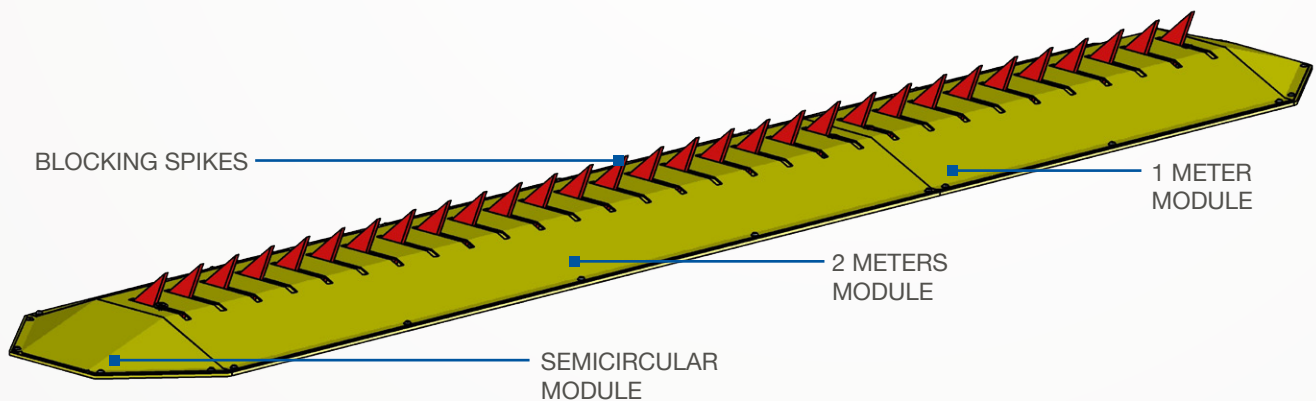

PAG.1/2

PILOMAT

100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2016© Pilomat S.r.l. All rights reserved

TKSMALL_DATASHEET.17 REVIEW 03/04/2017

Information in this document is for reference only. In pursuit of its policy of continuous refinement and improvement, Pilomat reserves the right to amend this information at any time and without prior notice. Picture shown is for illustration purpose only.

TYRE KILLER SMALL




AVAILABLE ITEMS

TYRE KILLER SMALL

BLOCKING ELECTROMAGNET FOR FREE TRANSIT IN BOTH TRAFFIC WAYS

KIT 2 ACCUMULATORS FOR ELECTROMAGNET

BLOCKING SPIKES HEIGHT	80mm
TYRE KILLER LENGTH	STANDARD: 2m-3m-4m-5m-6m
DISTANCE BETWEEN BLOCKING SPIKES	105mm (i.e. TK SMALL 2m: 20 BLOCKING SPIKES)
BLOCKING SPIKES THICKNESS	10mm
TOTAL DIMENSION	LENGTH 2m: 2100x625x86mm (FOR OTHER LENGTHS ADD 1050mm MODULES - i.e. LENGTH 6m: 6300mm)
MOVEMENT	COUNTERWEIGHT TO ALLOW ONLY THE EXIT TRANSIT
TYRE KILLER STRUCTURE FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING COLOR: YELLOW
BLOCKING SPIKE FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING COLOR: RED
LOAD CLASS	U.N.I. C250 REGULATION
TYPE OF USE	INTENSIVE
LOCK IN LOW POSITION FOR FREE TRANSIT	YES (OPTIONAL)
KIT OF 2 SEMICIRCULAR TERMINAL MODULES	YES (OPTIONAL)

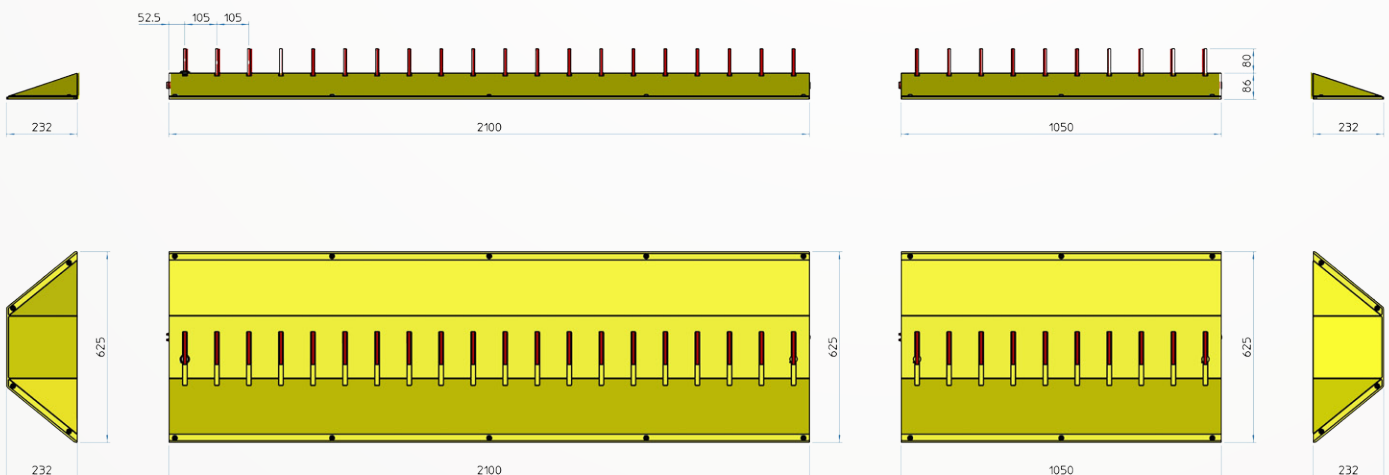

PAG.2/2



100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
 Via Zanica 17/p, 24050, Grassobbio (BG) Italy
 Tel. +39.035.29.72.20
 Copyright 2016© Pilomat S.r.l. All rights reserved

TKSMALL_DATASHEET.17 REVIEW 03/04/2017